## New SPEED 10 - GNSS Speed and Position Measurement Unit








## New SPEED 10 - GNSS Speed and Position Measurement Unit

GENERAL	
Supply voltage	+10V to 36V
Power consumption	0.4W
Case construction	Die-cast aluminium
Dimensions	163 x 62 x 34mm
Mass	295g
IP rating	IP50
Operating temperature range	-40 to 70 °C
Humidity	5 to 95% non-condensing
Mounting method	Cases stack to other RT products or mount with brackets/Velcro
Outputs	RS232, CAN, Pulse
DATA ACCURACY	
Speed accuracy	<0.05m/s 50% of the time at 30m/s
Position accuracy	2.5m CEP 50% of the time
CAN	
Maximum baud rate	1 Mbit/s
Data rate	10Hz for GNSS data, vehicle dependant for OBD-II data
Identifiers	Configurable addresses, 11 or 29 bit
Termination	None. Must be terminated externally
RS232	
Baud rate	115200 baud
Data rate	10Hz for GNSS data, vehicle dependant for OBD-II data
RS232 data format	Race Technology standard GPS, temperature, pressure channels
PULSE OUTPUT	
Maximum pulse rate	>20kHz
Output format	50% duty cycle square wave
Voltage	0-5V
ORDER CODES	
SPEED 10 main system	SPEED 10
	OBDIISPEED 10

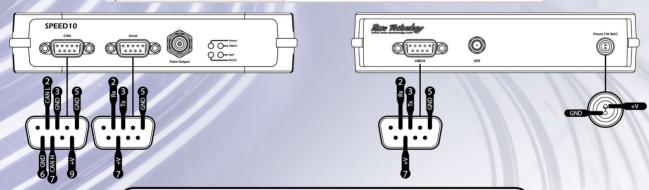

Race Technology Ltd (UK)

16 King Street, Eastwood, Nottingham, NG16 3DA

Tel: +44 (0)1773 537620 Fax: +44 (0)1773 537621

Email: sales@race-technology.com



